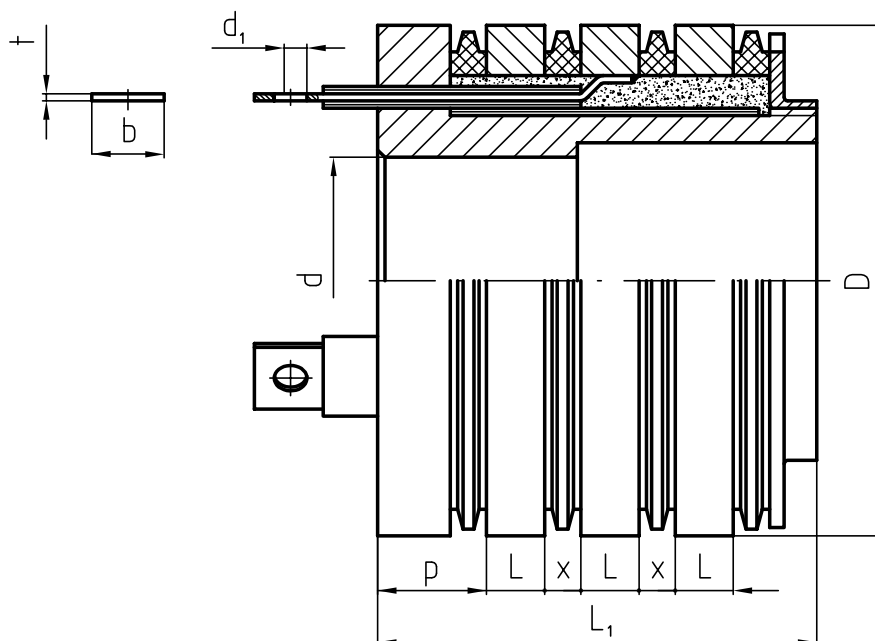


S UPEVNĚVACÍ MATICÍ

WITH MOUNTING NUT ● MIT ANZUGSMUTTER


 mark of climatic
N,T23
 resistance

| D_n | No. | i | U_n | CR | D | L | d | L_1 | x | p | d_1 | bxt | m [kg] |
|-------|---------|---|-------|-----|-------|----|-----|-------|----|----|-------|------|--------|
| 100 | 1410030 | 3 | 380V | N | 100.5 | 12 | 45 | 76 | 6 | 12 | M5 | 12x2 | 2.50 |
| 125 | 1412080 | 3 | 380V | N | 125.7 | 16 | 55 | 98 | 8 | 16 | M6 | 16x3 | 4.80 |
| | 1412090 | 3 | 380V | N | 125.7 | 16 | 60 | 98 | 8 | 16 | M6 | 16x3 | 4.80 |
| 140 | 1414160 | 3 | 600V | N | 140.7 | 16 | 68 | 121 | 10 | 30 | M8 | 20x3 | 6.00 |
| 160 | 1416120 | 3 | 600V | N | 161.0 | 20 | 80 | 151 | 15 | 30 | - | 20x3 | 12.0 |
| | 1416200 | 3 | 380V | T23 | 161.0 | 20 | 75 | 136 | 12 | 24 | M8 | 20x4 | 10.5 |
| | 1416260 | 3 | 380V | N | 161.0 | 20 | 85 | 136 | 12 | 24 | M8 | 20x4 | 8.00 |
| 200 | 1420140 | 3 | 600V | N | 201.0 | 25 | 100 | 148 | 12 | 25 | M8 | 25x4 | 12.0 |
| | 1420150 | 3 | 600V | N | 201.0 | 25 | 110 | 148 | 12 | 25 | M8 | 25x4 | 12.0 |
| | 1420110 | 3 | 600V | T23 | 201.0 | 25 | 110 | 148 | 12 | 25 | M8 | 25x4 | 12.0 |
| 220 | 1422090 | 3 | 1000V | N | 221.0 | 50 | 105 | 300 | 20 | 76 | M12 | - | 35.0 |
| | 1422110 | 3 | 1000V | T23 | 221.0 | 50 | 105 | 300 | 20 | 76 | M12 | - | 35.0 |
| 250 | 1425220 | 3 | 600V | N | 251.0 | 32 | 115 | 171 | 12 | 24 | M10 | 30x4 | 21.0 |
| | 1425230 | 3 | 600V | N | 251.0 | 32 | 130 | 171 | 12 | 24 | M10 | 30x4 | 21.0 |

UNIVERSALSCHLEIFRINGE

UNIVERSAL SLIP RINGS

SBĚRACÍ KROUŽKY UNIVERZÁLNÍ