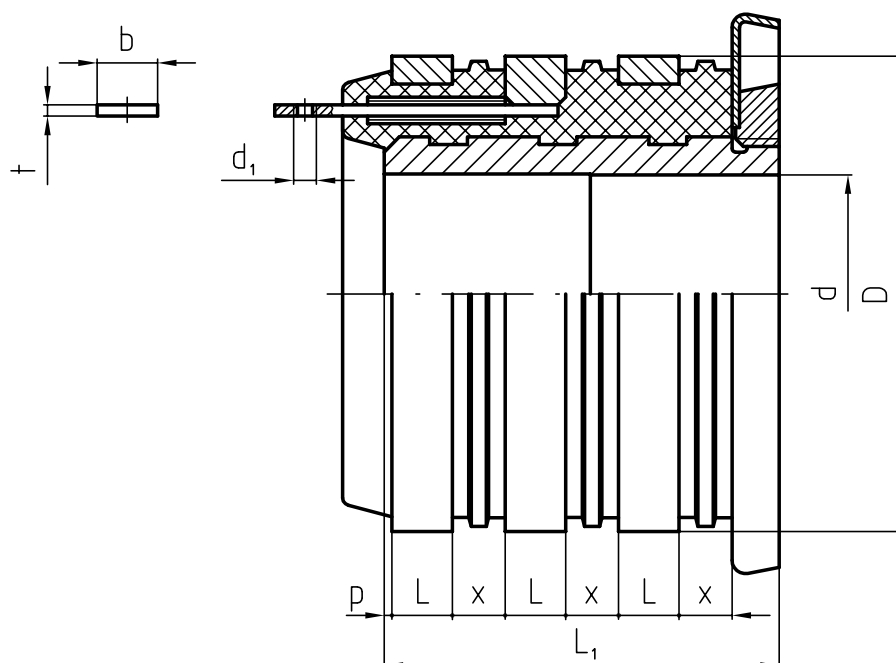


S VYVAŽOVACÍ DRÁŽKOU

WITH BALANCING GROOVE ● MIT AUSWUCHTNUT


 mark of climatic
N, T23
 resistance

D_n	No.	i	U_n	CR	D	L	d	L_1	x	p	d_1	bxt	m [kg]
120	1512200	3	300V	N	125.7	14	63	90.5	12	0	M6	16x3	4.80
	1512170	3	300V	T23	125.7	14	63	90.5	12	0	M6	16x3	4.80
	1512260	3	380V	N	125.7	16	63	102.5	14	0	M6	16x3	4.80
	1512240	3	380V	T23	125.7	16	63	102.5	14	0	M6	16x3	4.80
160	1516100	3	380V	N	160.7	25	75	149	12	24	M8	20x4	9.80
	1516080	3	500V	T23	160.7	25	75	149	12	24	M8	20x4	9.80
	1516110	3	500V	N	160.7	25	85	149	12	24	M8	20x4	9.80
	1516090	3	500V	T23	160.7	25	85	149	12	24	M8	20x4	9.80

UNIVERSALSCHLEIFRINGE

UNIVERSAL SLIP RINGS

SBĚRACÍ KROUŽKY UNIVERZÁLNÍ